

Testing Items		Testing Method	Typical Value	Unit
Viscosity		ASTM D445	150-500	mPa·s (25°C)
Density		ASTM D792	1.10-1.20	g/cm³
Color		-	Orange、Grey、Beige	-
Temperature Properties		ASTM D648	>80	°C (0.45 MPa)
Shore Hardness		ASTM D2240	92.0	Shore D
Flexural Properties	Flexural Strength	ISO 178: 2001	88	MPa
	Flexual Modulus	ISO 178: 2001	2580	MPa
Impact Properties	Notched IZOD	ISO 180: 2000	18-24	J/m

Notes:

- 1.It was tested with 3D printed specimen.
- 2.All test pieces were printed with a RAYSHAPE Edge E2 3D printer.

Specimens

Fig 1. Impact testing specimen


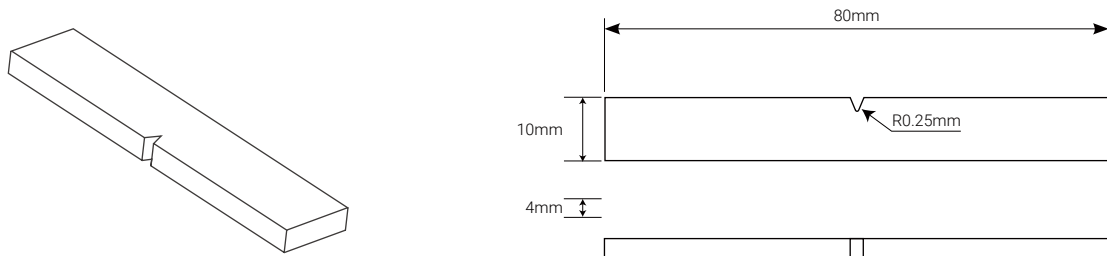


Fig 2. Flexural testing specimen

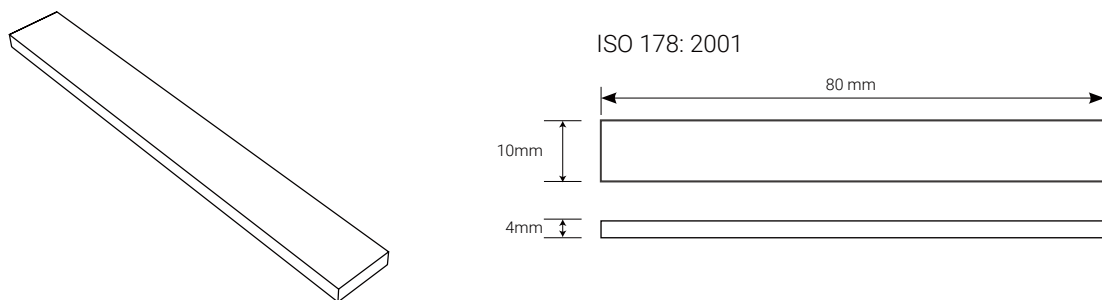

Disclaimer

The typical values presented in this data sheet are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary significantly with printing conditions. Enduse performance of printed parts depends not only on materials, but also on part design, environmental conditions, printing conditions, test conditions, etc. Product specifications are subject to change without notice.

Each user is responsible for determining the safety, lawfulness, technical suitability, and disposal/recycling practices of RAYSHAPE materials for the intended application. RAYSHAPE makes no warranty of any kind, unless announced separately, to the fitness for any particular use or application. RAYSHAPE shall not be made liable for any damage, injury or loss induced from the use of Mankati materials in any particular application, as well as for identifying the proper disposal (or recycling) method consistent with applicable environmental laws and regulations.

RAYSHAPE

www.rayshape3d.com



sales.os@rayshape3d.com

Contact the sales team for more information